

CLOPAY COMMERCIAL – MODEL 3715

energy series with intellicore®



Model 3715, 14'2" x 14" doors

| CONSTRUCTION | EFFICIENCY | WARRANTY |
|----------------------------|------------------------|--|
| 1 3/8" THICKNESS | 12.9 R-VALUE | 10YR LIMITED CONSTRUCTION |



POLYURETHANE INSULATED STEEL DOORS WITH MINOR RIBS

Clopay Model 3715 is an ideal choice for commercial and industrial facilities where economy is required without sacrificing reliability and workmanship.


- **Intellicore®** insulation provides the highest energy efficiency, while remaining environmentally friendly.
- **Steel-Sandwich Construction** enhances durability and strength.
- **3-Stage Paint Process** delivers a maintenance-free finish.
- **Thermal Break** enhances insulating properties for extreme energy efficiency.
- **Optional Accessories** add functionality while complementing the building.



Panels are preprimed inside and out to inhibit rust. Hot-dipped, galvanized steel is painted with primer and given a tough oven-baked polyester top coat to provide the most rust-resistant steel door available. Ten-year warranty against rust-through.

clopaycommercial.com

PANEL DESIGN



Minor Ribbed

COLOR OPTIONS



Standard White Glacier White Commercial Tan Chocolate



Mocha Brown Gray

Due to the printing process, colors may vary.

CUSTOM PAINT OPTION



Color Blast™ offers more than 1,500 Sherwin-Williams® color options to complement your building design. Clopay's durable factory finish has been thoroughly tested and is backed by a five-year warranty.

Due to solar reflective formulation to meet greater than an 38 LRV some colors may not be available.

FEATURES

STANDARD HARDWARE

- 18 gauge single-end stiles; 16 gauge double-end stiles
- PVC vinyl astragal with aluminum retainer
- Commercial 10-ball steel rollers (nylon tires available)
- Steel step plate and lift handle
- Heavy-duty galvanized end stiles
- Inside slide lock for increased security
- 19 gauge steel hinge support plates
- 2" (50.8 mm) or 3" (76.2 mm) track
- 10,000 cycle springs
- Galvanized aircraft cable with minimum 7:1 safety factor
- Variety of track configurations to meet building specifications

MATERIALS AND CONSTRUCTION

| | |
|--------------------|---|
| Panel Thickness | 1-3/8" (34.9 mm) |
| Insulation | CFC and HCFC-free Intellicore® polyurethane |
| R-value | 12.9* |
| Thermal Break | Continuous foam |
| Exterior Steel | 27 gauge (.016" min.) (.41 mm) |
| Interior Steel | 28 gauge (.015" min.) (.38 mm) |
| Exterior Surface | Stucco embossed, minor ribbed |
| Max Width | 18'2" (5.5 m) |
| Max Height | 16' (4.9 m) |
| Exterior Colors | Standard White, Glacier White, Commercial Tan, Chocolate, Mocha Brown and Gray. Also available in Color Blast™. |
| Interior Color | Standard White |
| Limited Warranties | 10-Year delamination 10-Year rust-through 1-Year material and workmanship |

*Calculated door section R-value is in accordance with DASMA TDS-163.

For special sizes, applications and options, consult Commercial Information Assistance (CIA) at 1-800-526-4301.



For more information on these and other Clopay products, call 1-800-526-4301 or visit clopaycommercial.com



©2016 Clopay Building Products Company, Inc., a Griffon company.

ADDITIONAL OPTIONS

WINDOW OPTIONS



24" x 8"

24" x 12"




Full View

26" x 13"

Available with insulated, insulated tempered or tempered glass. Full vision section, preapainted standard white or chocolate; glazing options include DSB, tempered, plexiglass, and insulated. 26" x 13" (66.04 cm x 33.02 cm) windows are available with Lexan® or plexiglass.

HEAVY-DUTY HARDWARE (where not standard)

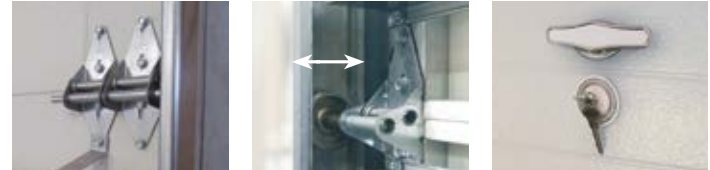


Double-end hinge

3" Track

Outside keyed lock

HIGH CYCLE SPRINGS



25,000, 50,000 or 100,000 cycle springs available.

MULLIONS



Carry-away, roll-away or swing-up mullions are available on select sizes.

EXHAUST PORT



Can be cut into any type of sectional door. Available in select sizes.



WINDCODE® doors are available in many sizes and pressure ratings.

DISTRIBUTED BY:

