

CLOPAY COMMERCIAL – MODEL 3722

energy series with intellicore®



Model 3722, 22'2" x 14' doors, shown with 24" x 8" Lites

CONSTRUCTION	STEEL	EFFICIENCY	WARRANTY
2" THICKNESS	20 GAUGE	18.4 R-VALUE	10YR LIMITED CONSTRUCTION



POLYURETHANE INSULATED FLUSH STEEL DOORS

Clopay Model 3722 is for commercial and industrial facilities where demanding conditions require a rugged door that is also energy efficient.

- **Intellicore®** insulation provides the highest energy efficiency, while remaining environmentally friendly.
- **Steel-Sandwich Construction** enhances durability and strength.
- **3-Stage Paint Process** delivers a maintenance-free finish.
- **Thermal Break** enhances insulating properties for extreme energy efficiency.
- **Optional Accessories** add functionality while complementing the building.



Panels are preprimed inside and out to inhibit rust. Hot-dipped, galvanized steel is painted with primer and given a tough oven-baked polyester top coat to provide the most rust-resistant steel door available. Ten-year warranty against rust-through.

clopaycommercial.com

PANEL DESIGN



Flush

COLOR OPTIONS



Standard White

Chocolate

Due to the printing process, colors may vary.

CUSTOM PAINT OPTION



Color Blast™ offers more than 1,500 Sherwin-Williams® color options to complement your building design. Clopay's durable factory finish has been thoroughly tested and is backed by a five-year warranty.

Due to solar reflective formulation to meet greater than an R38 LRV some colors may not be available.

FEATURES

STANDARD HARDWARE

- 18 gauge single-end stiles; 16 gauge double-end stiles
- PVC vinyl astragal with aluminum retainer
- Commercial 10-ball steel rollers (nylon tires available)
- Steel step plate and lift handle
- Heavy-duty galvanized end stiles
- Inside slide lock for increased security
- 19 gauge steel hinge support plates
- 2" (50.8 mm) or 3" (76.2 mm) track
- 10,000 cycle springs
- Galvanized aircraft cable with minimum 7:1 safety factor
- Variety of track configurations to meet building specifications

MATERIALS AND CONSTRUCTION

Panel Thickness	2" (50.8 mm)
Insulation	CFC and HCFC-free Intellifore® polyurethane
R-value	18.4*
Thermal Break	Continuous foam
Exterior Steel	20 gauge (.034" min.) (.86 mm)
Interior Steel	28 gauge (.015" min.) (.38 mm)
Exterior Surface	Stucco embossed, flush
Max Width	36'2" (11 m)
Max Height	24' (7.3 m)
Exterior Colors	Standard White and Chocolate. Also available in Color Blast™.
Interior Color	Standard White
Limited Warranties	10-Year delamination 10-Year rust-through 1-Year material and workmanship

*Calculated door section R-value is in accordance with DASMA TDS-163.

For special sizes, applications and options, consult Commercial Information Assistance (CIA) at 1-800-526-4301.



For more information on these and other Clopay products, call 1-800-526-4301 or visit clopaycommercial.com



©2016 Clopay Building Products Company, Inc., a Griffon company.

ADDITIONAL OPTIONS

WINDOW OPTIONS



24" × 8"


24" × 12"

Full View

26" × 13"

Available with nominal insulated, nominal insulated tempered or tempered glass. Full vision section, pre-painted standard white or chocolate; glazing options include DSB, tempered, plexiglass, insulated, insulated tempered and polycarbonate. 26" × 13" (66.04 cm × 33.02 cm) windows are available with Lexan® or plexiglass.

HEAVY-DUTY HARDWARE (where not standard)

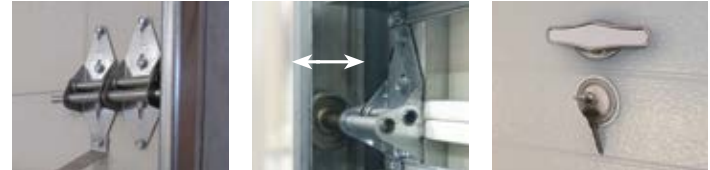

Double-end hinge

3" Track

Outside keyed lock

HIGH CYCLE SPRINGS



25,000, 50,000 or 100,000 cycle springs available.

MULLIONS



Carry-away, roll-away or swing-up mullions are available on select sizes.

BREAK-AWAY SECTION



Single section and double sections available on select sizes.

PASS DOOR



32" wide × 80" high (.81 m × 2.3 m), max 16'2" (4.9 m) wide section.

EXHAUST PORT



Can be cut into any type of sectional door. Available in select sizes.



WINDCODE® doors are available in many sizes and pressure ratings.



Upgrade your standard door with industrial-grade components.

DISTRIBUTED BY:

