

# CLOPAY COMMERCIAL – MODELS 3154, 3155

## energy series



Model 3154, 12' x 10' door

CONSTRUCTION	EFFICIENCY	WARRANTY
1 <sup>3</sup> / <sub>8</sub> " THICKNESS	6.5 R-VALUE	10YR LIMITED CONSTRUCTION

## POLYSTYRENE INSULATED STEEL DOORS

Clopay Models 3154 and 3155 are high quality doors designed for commercial and industrial facilities and provide the durability of a 27 gauge exterior steel skin in an energy efficient door system.

- **Polystyrene Insulation** provides comfort, energy efficiency and quiet operation in every season.
- **Steel-Sandwich Construction** enhances strength and dent resistance.
- **3-Stage Paint Process** delivers a maintenance-free finish.
- **Optional Accessories** add functionality while complementing the building.



Panels are pre-painted inside and out to inhibit rust. Hot-dipped, galvanized steel is painted with primer and given a tough oven-baked polyester top coat to provide the most rust-resistant steel door available. Ten-year warranty against rust-through.

[clopaycommercial.com](http://clopaycommercial.com)

## PANEL DESIGNS



Flush (3155)

Elegant Raised (3154)

## COLOR OPTIONS



Standard White

Almond

Sandtone

Bronze

Chocolate

Hunter Green

Gray

Due to the printing process, colors may vary.

## CUSTOM PAINT OPTION



Color Blast™ offers more than 1,500 Sherwin-Williams® color options to complement your building design. Clopay's durable factory finish has been thoroughly tested and is backed by a five-year warranty.

Due to solar reflective formulation to meet greater than an 38 LRV some colors may not be available.

## FEATURES

### STANDARD HARDWARE

- 18 gauge single-end stiles; 16 gauge double-end stiles
- PVC vinyl astragal with aluminum retainer
- Commercial 10-ball steel rollers (nylon tires available)
- Steel step plate and lift handle
- Heavy-duty galvanized end stiles
- Inside slide lock for increased security
- 19 gauge steel hinge support plates
- 2" (50.8 mm) or 3" (76.2 mm) track
- 10,000 cycle springs
- Galvanized aircraft cable with minimum 7:1 safety factor
- Variety of track configurations to meet building specifications

### MATERIALS AND CONSTRUCTION

Panel Thickness	1-3/8" (34.9 mm)
Insulation	1-3/8" (34.9 mm) Polystyrene
R-value	6.5*
Exterior Steel	27 gauge (.016" min.) (.41 mm)
Interior Steel	28 gauge (.015" min.) (.38 mm)
Exterior Surface	Woodgrain embossed, elegant raised (3154) Woodgrain embossed, flush (3155)
Max Width	18'2" (5.5 m)
Max Height	16' (4.9 m)
Exterior Colors	Standard White, Almond, Sandtone, Bronze, Chocolate, Hunter Green and Gray. Also available in Color Blast™.
Interior Color	Standard White
Limited Warranties	10-Year delamination 10-Year rust-through 1-Year material and workmanship

\*Calculated door section R-value is in accordance with DASMA TDS-163.

For special sizes, applications and options, consult Commercial Information Assistance (CIA) at 1-800-526-4301.




For more information on these and other Clopay products, call 1-800-526-4301 or visit [clopaycommercial.com](http://clopaycommercial.com)



©2016 Clopay Building Products Company, Inc., a Griffon company.

## ADDITIONAL OPTIONS

### WINDOW OPTIONS

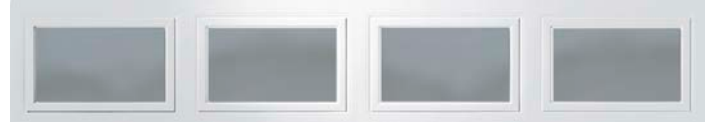

19-1/2" x 12"

Models 3154 and 3155 are available with DSB, plexiglass and insulated glass.

### HEAVY-DUTY HARDWARE (where not standard)



3" Track



Outside keyed lock

### HIGH CYCLE SPRINGS



25,000, 50,000 or 100,000 cycle springs available.

### MULLIONS



Carry-away, roll-away or swing-up mullions are available on select sizes.

### EXHAUST PORT



Can be cut into any type of sectional door. Available in select sizes.



WindCode® doors are available in many sizes and pressure ratings.



Upgrade your standard door with industrial-grade components.

### DISTRIBUTED BY:

